S9922M44-LTE



© 2026 Ricon

RICON S9922M44-LTE, is a router with LTE Cat.4 cellular connectivity, designed for industrial and commercial applications where multiple devices need reliable network access. Its durable IP54 aluminum housing and 4 × Fast Ethernet LAN, 1 × Fast Ethernet WAN ports suit environments that require multi-device connectivity. It offers flexible connectivity options with a dual SIM slot and 2.4 GHz Wi-Fi (802.11 b/g/n) support.

S9922M44-LTE supports network continuity with dual SIM and automatic failover/failback between cellular and wired connections. Multiple Ethernet ports and a durable industrial design make it a practical and efficient connectivity solution for branches, retail points of sale, IP camera systems, industrial control units and remote field monitoring applications.

S9922M44-LTE can be configured via the web interface and CLI; it can be monitored centrally and managed remotely through the Ricon Management System (RMS). With SMS-based Zero-Touch provisioning support, it simplifies the commissioning of devices and helps reduce the need for field intervention and operational costs.

Features

- LTE / 4G / 3G support
- Dual SIM / Multi-SIM
- Failover/Failback
- IPSec VPN
- OpenVPN
- L2TP / PPTP
- GRE Tunneling
- DMVPN
- Firewall
- MAC / IP Filter
- DoS/DDoS Protection
- HTTPS / SSH Connection
- Static and Dynamic Routing
- BGP
- OSPF / RIP
- VLAN
- NAT / Port Forwarding / DMZ
- DHCP Server / Client
- Bridging / Passthrough
- Policy-based Routing (PBR)
- Web GUI (HTTPS)
- CLI (SSH / Telnet)
- SNMP
- TR-069
- Syslog / Event Log
- OTA Software Update
- SMS Commands
- Cloud Management Platform
- Wi-Fi 4
- WPA2
- MAC Filter
- Connection Timers
- Ping / Uptime Watchdog
- Automation via SMS
- Task Definition via Script File
- Modbus TCP / MQTT
- MQTT over TLS
- Identity-Based Firewall
- Cloud Access Control (CASB)
- TLS Inspection

Specifications

Dimensions and Weight

- Height: 178mm
- Width: 105mm
- Depth: 28mm
- Weight: 464g
- Rugged industrial aluminum metal housing
- IP54 protection

Environmental

- Idle: 80mA + 12VDC
- Single Module Power: <5W
- Power Supply: 5 - 35VDC

Certifications

- **ATEX Zone 1 & 21 Certified II 2G Ex db IIB T6 Gb / II 2D Ex tb IIIC T85°C Db**

© 2026 Ricon

General Specs

CPU	MT7628AN
Memory	128MB
HW Watchdog	Connection timers Ping / Uptime Watchdog SMS automation Scripting tasks
SPI Flash	16MB

Interfaces and Configuration

LAN	4 x 10/100TBase Ethernet
WAN	1x10/100 Mb
DHCP Server	DHCP Server/Client/Relay, DNS

Cellular Features

Cellular Modem Module	EC200A-EU
Module Type	PCIE
Region	Global
Chipset	UNISOC 8910DM
Category	LTE: Cat.4
Cellular Bands	LTE-FDD B1/ 3/ 5/ 7/ 8/ 20/ 28 LTE-TDD B38/ 40/ 41 WCDMA B1/ 5/ 8 GSM 900/1800 MHz
SIM Support	2 x U-SIM Cards

© 2026 Ricon

Security Features

Firewall	Identity-Based Firewall Cloud Access Control (CASB) TLS Inspection
Filters	Access restriction Wireless access restriction
Misc	Security log Security alarms Packet capture log (pcap to dump file)

GNSS / GPS Features (Optional)

Chipset	ATGM336D
Supported Bands	GPS/ QZSS: L1 C/A, L5 GLONASS: L1 Galileo: E1, E5a BDS: B1I, B2a
Default Constellations	GPS + GLONASS + Galileo + BDS + QZSS
Number of Simultaneous GNSS	4 + QZSS
Protocols	OSPF Routing protocols RIP Routing protocols WPA2 Wi-Fi encryption protocols Industrial data communication protocols
SBAS	WAAS, EGNOS, MSAS and GAGAN

Management Features

Management Interfaces	Web GUI (HTTPS) CLI (SSH / Telnet) SNMP TR-069 Syslog / Event Log OTA Firmware Update SMS Command Cloud Management Platform
Version Management	Image Checksum Active version and backup version Automatic rollback when remote upgrade fails
Account Management	Integrated Admin/Guest accounting TACACS/TACACS+, Radius Auth. models
Retrievable Parameters WEB UI / CLI / TR-069 / SNMP	CLI command-line access SNMP remote monitoring and management Web-based graphical interface management

© 2026 Ricon

Cellular Modem Features

APN Data Services	Dynamic APN support SIM PIN management Bridge Mode Support
Modem Interface Configuration	SIM Slot selection Full band scan Modem Band Lock Automatic/On-demand dialing Enable/Disable Radio Pppd and DHCP dialing options
Modem Backup	Supports backup on interface failure. Supports backup on traffic flow interruptions Supports automatic connection recovery.

Wi-Fi

Chipset	MT7628AN
Wi-Fi Features	Wi-Fi Radio: 1x1 MIMO / 20/40 MHz Frequency Band: 2.4 GHz only Client Capacity: Up to 20~25 simultaneous clients (depends on firmware/device) Wi-Fi Standard (2.4 GHz) : IEEE 802.11 b/g/n MIMO Configuration: 1x1 Channel Bandwidth: 20/40 MHz Modulation: BPSK, QPSK, 16-QAM, 64-QAM Tx Output Frequency Range: 2400–2483.5 MHz Maximum Data Rate: Up to 150 Mbps (with 40 MHz channel) Security Protocols: WEP, WPA, WPA2 (AES/TKIP) Total Wi-Fi Throughput: Up to ~150 Mbps (ideal conditions, 802.11n, 40 MHz)
Region	Global
Wireless Security	Protocols: WEP, WPA, WPA2 Encryption: AES, TKIP
Mode	Access Point and WiFi Client (Station) modes are supported

© 2026 Ricon

Network Features

Network Features	Static Routing, Dynamic Routing BGP OSPF / RIP VLAN NAT / Port Forwarding / DMZ DHCP Server / Client Bridging / Passthrough Policy-Based Routing (PBR) Support
Tunnels	IPSec VPN OpenVPN L2TP PPTP SSTP GRE Tunneling DMVPN Firewall MAC / IP Filtering DoS/DDoS Protection HTTPS / SSH Access
Routing	NAT Support Port Forwarding DMZ Support
Load Balancing	Per-Packet Forwarding Support


Ordering Information and Accessories

S9922M44-LTE	CAT4 Cellular Radio Interface 4xLAN, 1xWAN Fast Ethernet, 2xSIM Slots 2.4 GHz Wi-Fi 802.11b/g/n

Defaults

Default Box Contents	1 x S9922M44-LTE Router Hardware 1 x 12VDC 1.5A 18W Power Supply 2 x Rack mount kit 2 x RCN-LTE-ANT-IND LTE Antennas 1 x WiFi antenna for 2.4GHz 1 x 1m. CAT6 Ethernet patch cable

© 2026 Ricon

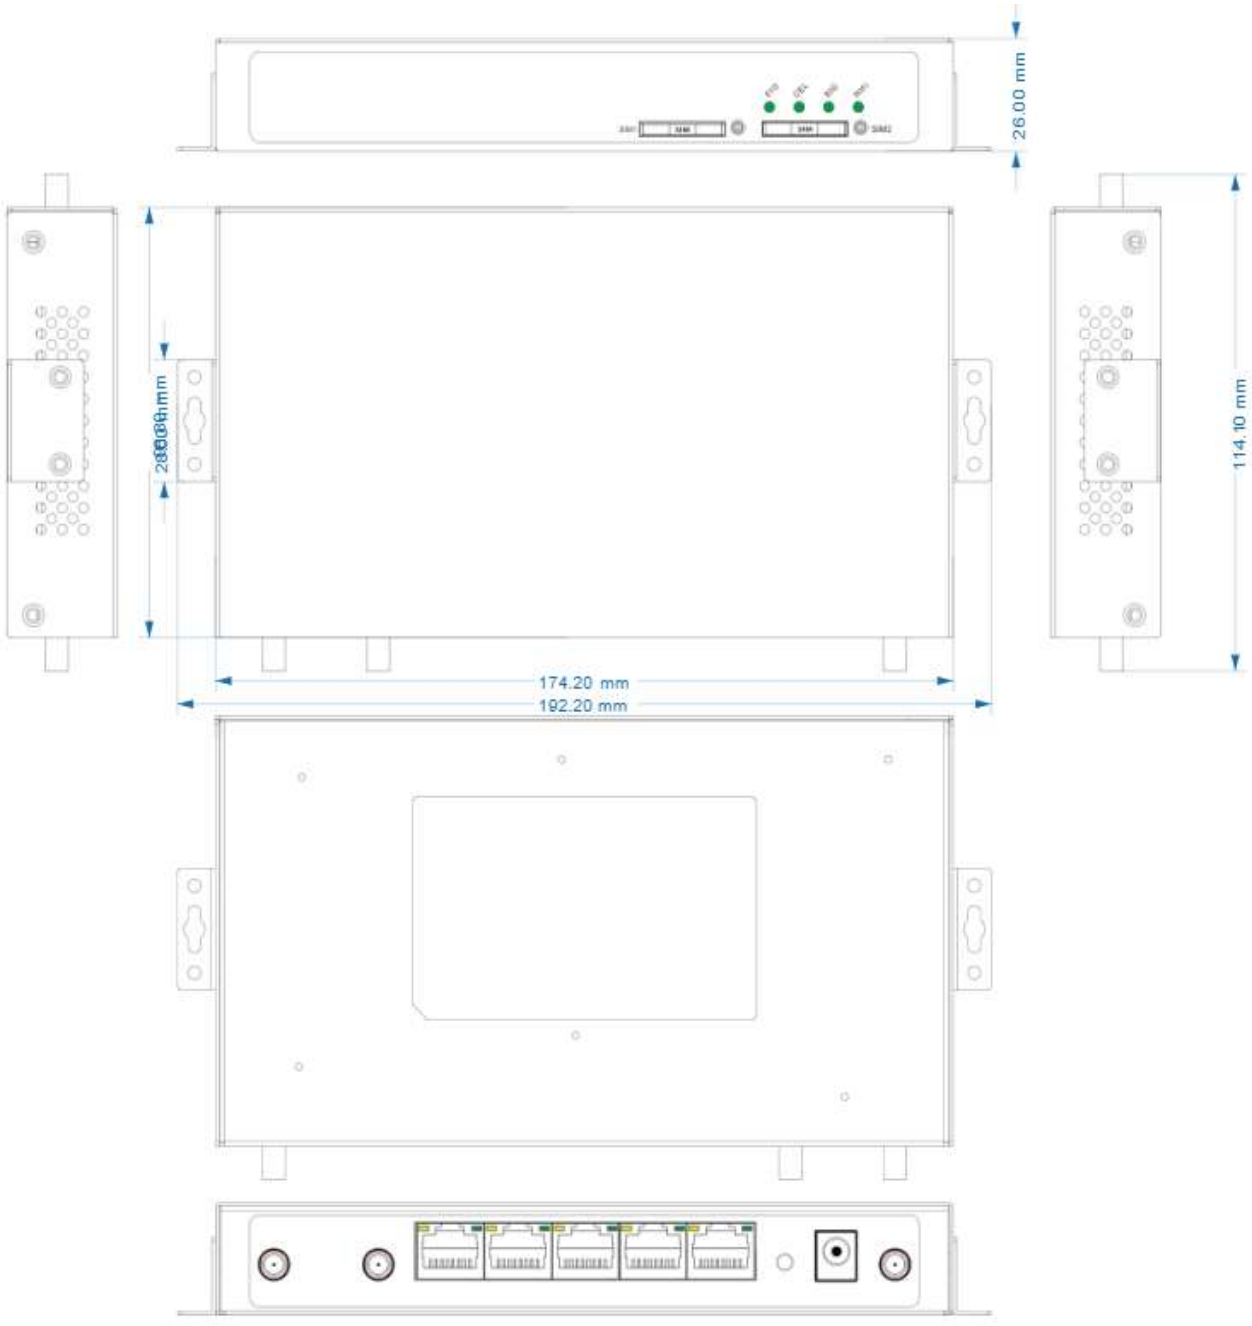

© 2026 Ricon

About Ricon

Ricon is a B2B technology company developing network technologies for the secure, uninterrupted and sustainable communication needs of businesses. With industry experience and a technology-driven approach, it delivers connectivity, communication and management solutions for mobile, fixed and cloud networks.

Helping service providers, businesses and partners build reliable and scalable network infrastructures, Ricon supports the development of strong and sustainable communication infrastructures with solutions that adapt to changing digital needs and requirements.

© 2026 Ricon

Ricon Canada Office (HQ)	Ricon Turkey Office	Ricon Turkey Office ITU	Ricon Italy Office
5063 North Service Road Burlington Ontario L7L 5H6 Canada riconrequest@riconmobile.com +1 (905) 921-3122 +1 (905) 336-2450	Ahi Evran Cad. No: 21 Polaris Plaza Kat: 6-8 Maslak İstanbul riconturkiye@riconmobile.com +90 212 346 26 00	Reşitpaşa Mah. ITU ARI 3 Teknokent No:4-Z101 Sarıyer İstanbul riconturkiye@riconmobile.com +90 212 346 26 00	Via Gaetano Negri 8 20123 Milano Italy riconitaly@riconmobile.com +39 02 87177914