

S9922L SERIES LTE ROUTER

MAC FILTER CONFIGURATION

Spintek iletisim A.S.(HQ)

Ahi Evran Cad. No:1, Polaris Plaza Kat:6/32
Maslak / İstanbul / Türkiye
Phone: (+90) 212 346 26 00

Ricon Mobile Inc.(HQ)

460 Brant Street Unit 300 Burlington,
Ontario Canada
+1 (905) 336 24 50

Ricon Mobile Inc. FZE

Ras Al Khaimah U.A.E.
Phone: (+97) 172 041 010 (U.A.E)

Ricon Mobile Inc. Ltd.

F5-Building 3, FengMenAo Industrial Park,
Bantian Streets, Longgang District
Shenzhen 518129, China

S9922L SERIES LTE ROUTER - MAC FILTER CONFIGURATION

BEFORE TO START:

- Device user information:
IP: <http://192.168.1.1>
- Username: admin
Password: admin

1) MAC FILTER CONFIGURATION

By setting the MAC address filtering, you can allow only your own device to access the network (whitelist), or do not allow unauthorized devices to access the network (blacklist), effectively preventing unauthorized network access.

1. Go to Security > MAC Filter page
2. Enable Mac Filter is selected Enable
3. Select the Policy;
 - I. Accept only the data packets conform to the following rules; Only connects entered MAC addresses to the router.
 - II. Discard packets conform to the following rules; Select this to block entered MAC addresses.
4. Under Add Filter Rule, Name and mac address you want to filter must be entered. Click the Add and Save and Apply icons.



MAC Filter

Mac Filter Setting

Enable Mac Filter: Enable Disable

Policy: Accept only the data packets conform to the following rules ▼

Max rule number:30

Number	Name	Enable	MAC
None			

Select All Delete Enable Disable

Add Filter Rule

Name: Enable


MAC(FF:FF:FF:FF:FF:FF):

Add Save Apply Cancel

2) MAC FILTER DELETE CONFIGURATION

To delete any MAC filter rule:

1. Go to Security > MAC Filter page
2. Select the mac address you want to delete and click the Delete and Save button.

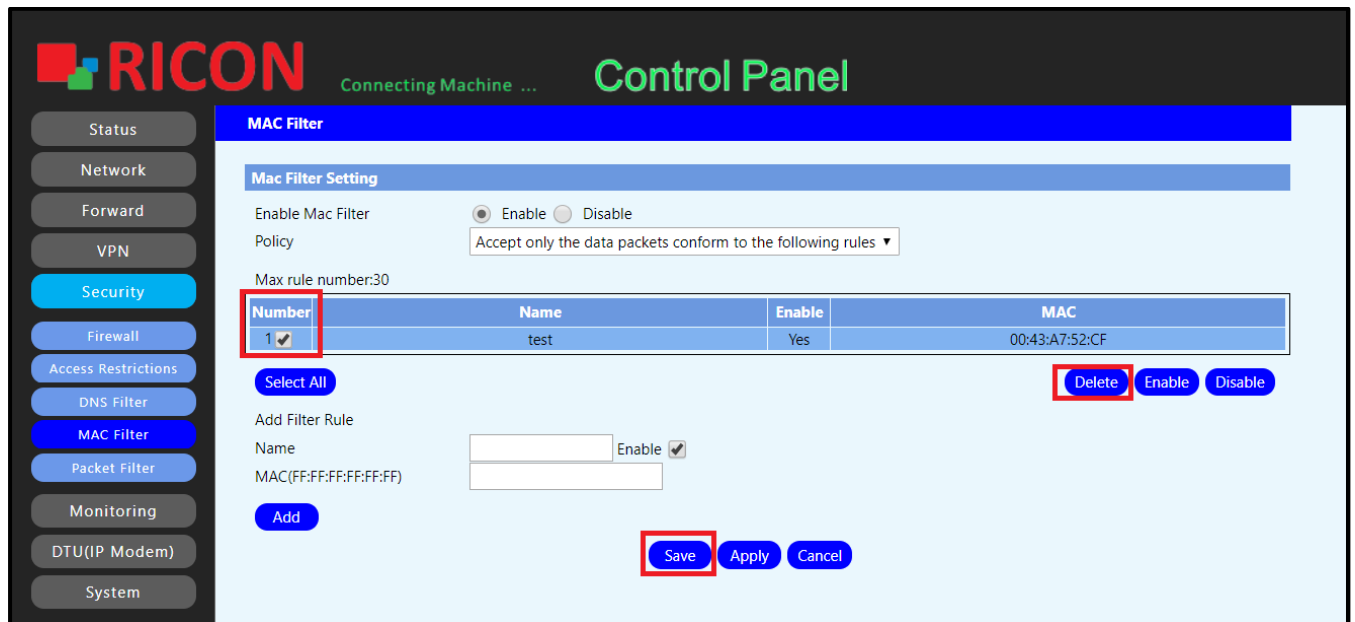

RICON Connecting Machine ... **Control Panel**

MAC Filter

Mac Filter Setting

Enable Mac Filter Enable Disable

Policy

Max rule number:30

Number	Name	Enable	MAC
1 <input type="checkbox"/>	test	Yes	00:43:A7:52:CF

Add Filter Rule

Name Enable

MAC(FF:FF:FF:FF:FF:FF)